


Part Numbers	Specifications	Applications	Features	Options
6401289 PULLER / STR. BLADE	DIAMETER 8" (190 mm)	HVAC Systems	Waterproof, IP68 (LL) Long Life High Efficiency	Mounting brackets EMC (Certified) Thermal Protector (ELL) Extreme Long Life
6403493 PUSHER / STR. BLADE	LOW PROFILE 24V 130W			



Test Voltage	V	26,0
Nominal Current	A	2,4
Nominal Speed	rpm	3.500
Max. St. Pressure	mmH ₂ O	25,0
Max. Airflow	m ³ /h	660
Weight	kg	1,2

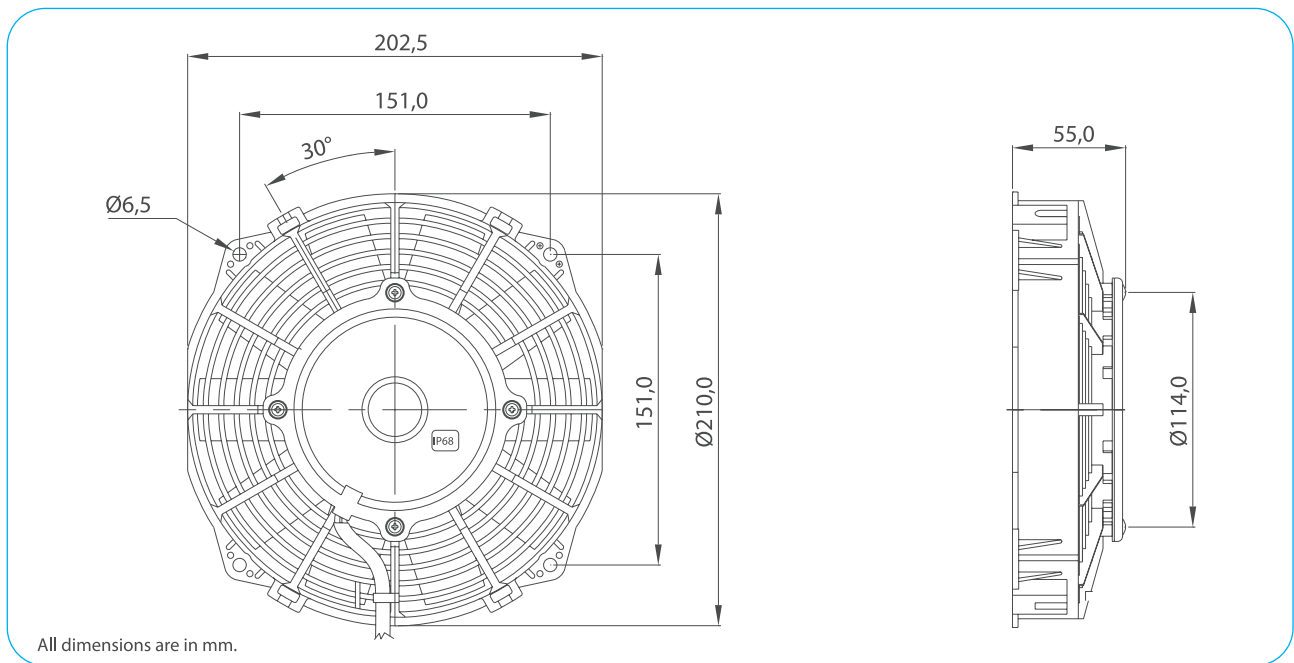

TEST VOLTAGE = 26,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H ₂ O	m ³ /h	A
	0,0	661,6	2,4
	2,5	619,9	2,4
	5,0	570,6	2,4
	7,5	506,4	2,5
	10,0	428,7	2,4
	12,5	341,3	2,4
	15,0	264,2	2,5
	17,5	199,5	2,6
	20,0	163,8	2,6
	25,2	0,0	2,8

Static Pressure: 1 mm H₂O = 0,04in H₂O = 9,8 Pa
Air Flow Rate: 1 m³/h = 0,59 cfm

