


Part Numbers	Specifications	Applications	Features	Options
<b>6403491</b> PULLER / STR. BLADE	<b>DIAMETER 8" (190 mm)</b>	HVAC Systems	Waterproof, IP68 (LL) Long Life High Efficiency	Mounting brackets EMC (Certified) Thermal Protector (ELL) Extreme Long Life
<b>6403492</b> PUSHER / STR. BLADE	<b>LOW PROFILE</b> <b>12V 130W</b>			



Test Voltage	V	13,0
Nominal Current	A	7,5
Nominal Speed	rpm	4.200
Max. St. Pressure	mmH <sub>2</sub> O	37,0
Max. Airflow	m <sup>3</sup> /h	760
Weight	kg	1,2

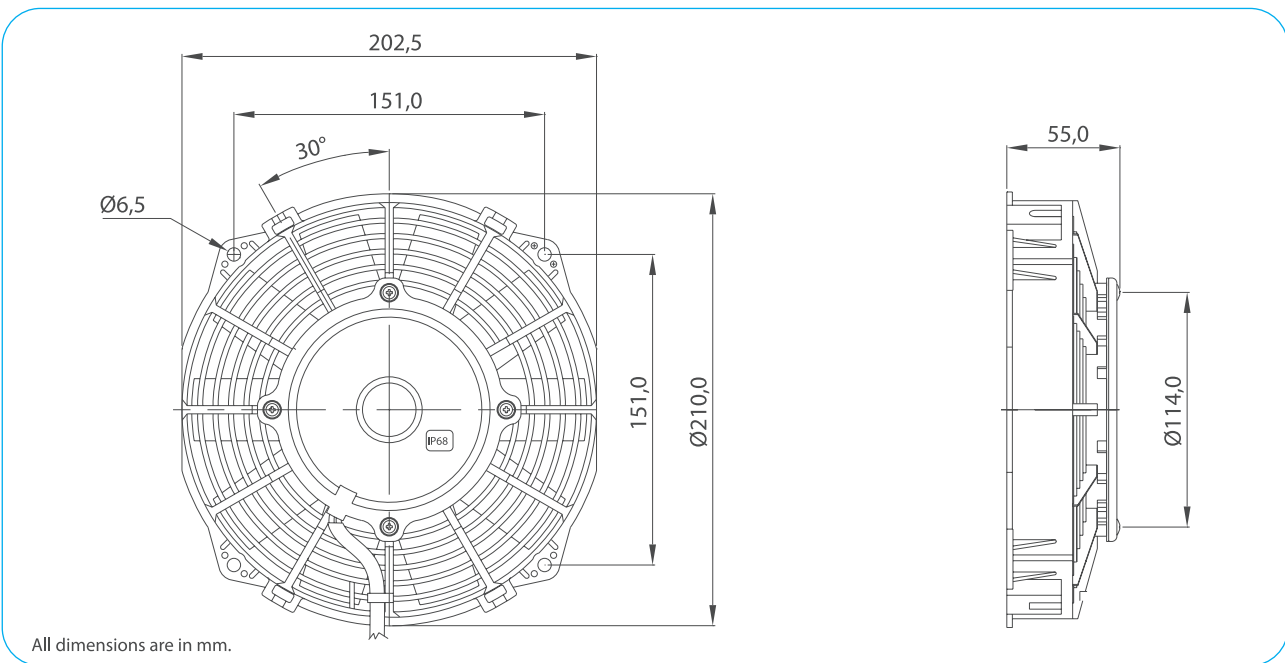

TEST VOLTAGE = 13,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H <sub>2</sub> O	m <sup>3</sup> /h	A
	0,0	758,7	7,6
	2,5	724,7	7,7
	5,0	688,6	7,8
	7,5	651,1	7,9
	10,0	609,1	7,9
	15,0	506,8	7,8
	20,0	373,3	7,8
	25,0	248,7	8,0
30,0	151,5	8,2	
36,9	0,0	8,5	

Static Pressure: 1 mm H<sub>2</sub>O = 0,04in H<sub>2</sub>O = 9,8 Pa  
Air Flow Rate: 1 m<sup>3</sup>/h = 0,59 cfm

