


Part Numbers	Specifications	Applications	Features	Options
<b>6401281</b> PULLER / STR. BLADE	<b>DIAMETER 8" (190 mm)</b>	HVAC Systems	Waterproof, IP68 (LL) Long Life High Efficiency	Mounting brackets EMC (Certified) Thermal Protector (ELL) Extreme Long Life
<b>6401282</b> PUSHER / STR. BLADE	<b>LOW PROFILE</b> <b>12V 130W</b>			



Test Voltage	V	13,0
Nominal Current	A	4,8
Nominal Speed	rpm	3.500
Max. St. Pressure	mmH <sub>2</sub> O	25,0
Max. Airflow	m <sup>3</sup> /h	660
Weight	kg	1,2

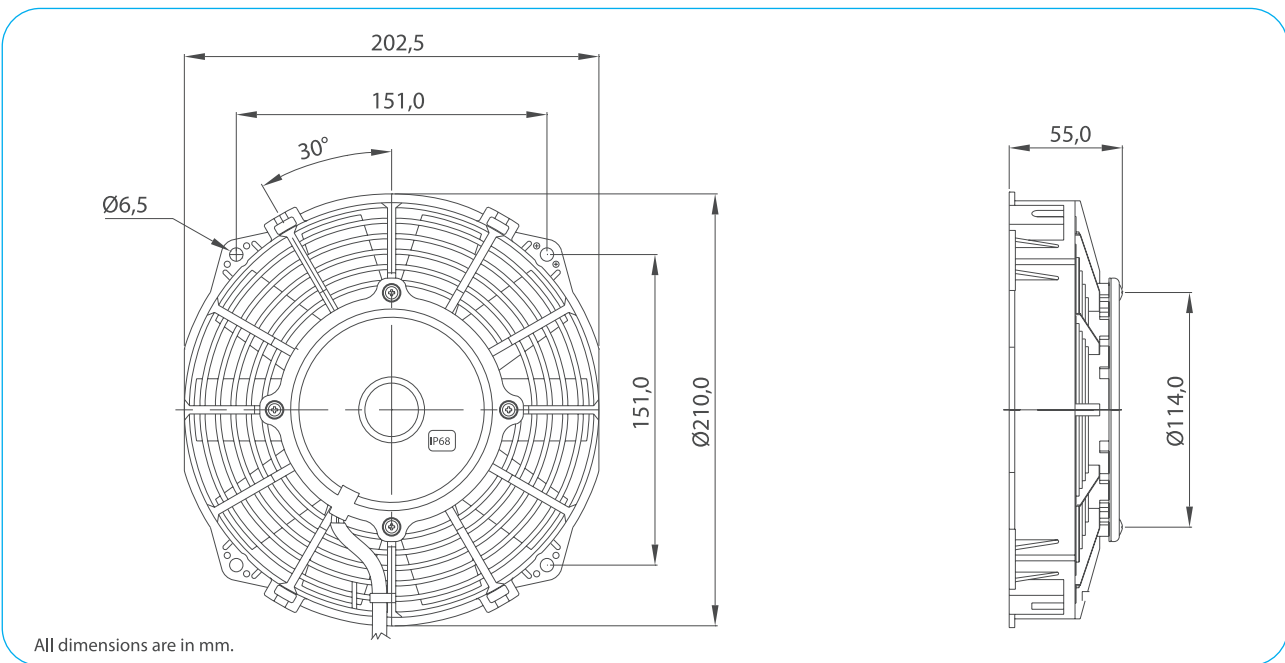

TEST VOLTAGE = 13,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H <sub>2</sub> O	m <sup>3</sup> /h	A
	0,0	666,0	4,8
	2,5	605,9	4,9
	5,0	557,8	4,9
	7,5	514,9	4,9
	10,0	441,1	4,8
	12,5	329,6	4,8
	15,0	244,4	4,8
	17,5	186,7	4,9
20,0	126,8	5,1	
24,7	0,0	5,5	

Static Pressure: 1 mm H<sub>2</sub>O = 0,04in H<sub>2</sub>O = 9,8 Pa  
Air Flow Rate: 1 m<sup>3</sup>/h = 0,59 cfm

