



Part Numbers	Specifications	Applications	Features	Options
<b>6403494</b> PULLER / STR. BLADE	<b>DIAMETER 8" (190 mm)</b>	HVAC Systems	Waterproof, IP68 (LL) Long Life High Efficiency	Mounting brackets EMC (Certified) Thermal Protector (ELL) Extreme Long Life
<b>6403495</b> PUSHER / STR. BLADE	<b>LOW PROFILE</b> <b>24V 130W</b>			

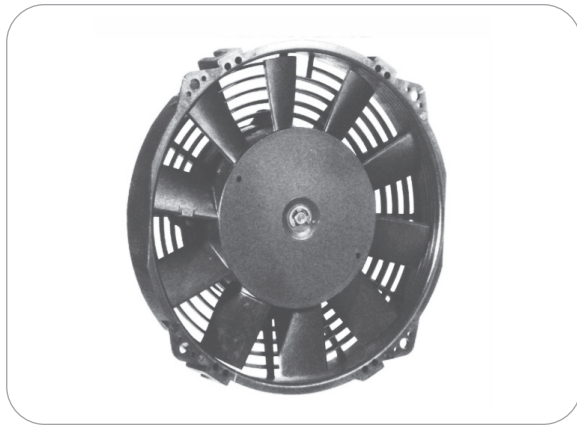

Test Voltage	V	26,0
Nominal Current	A	3,9
Nominal Speed	rpm	4.150
Max. St. Pressure	mmH <sub>2</sub> O	39,0
Max. Airflow	m <sup>3</sup> /h	805
Weight	kg	1,2

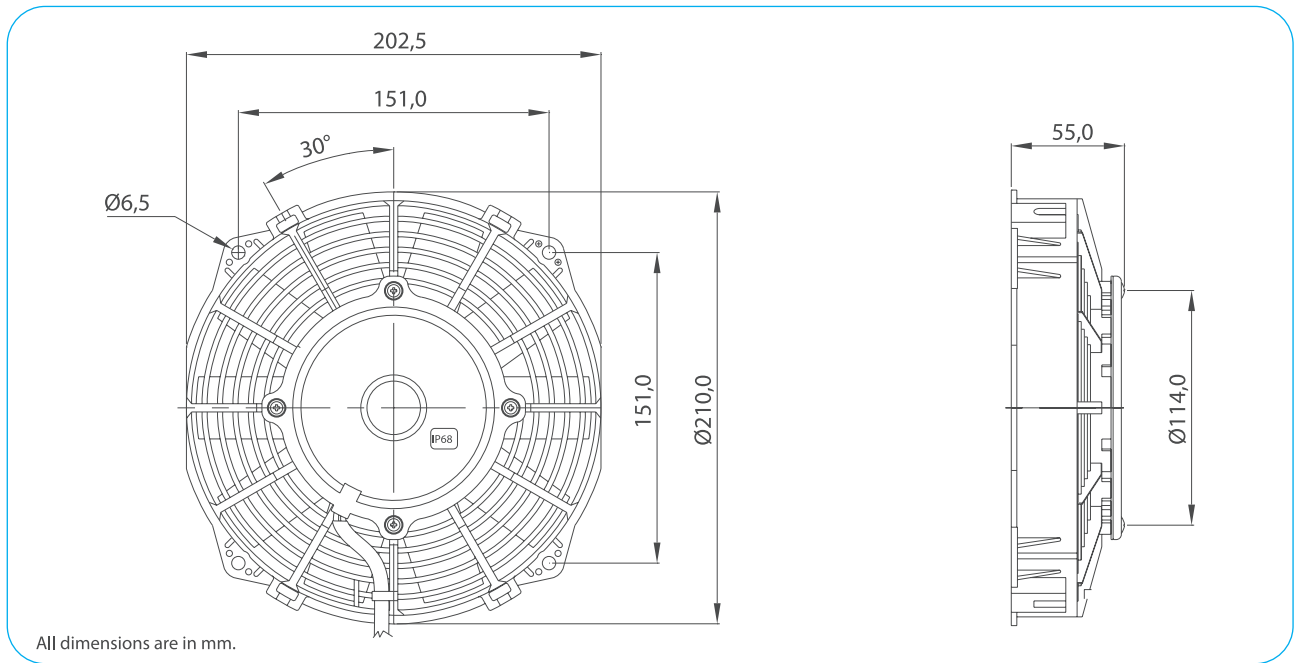

TEST VOLTAGE = 26,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H <sub>2</sub> O	m <sup>3</sup> /h	A
	0,0	806,8	3,9
	2,5	768,5	3,9
	5,0	729,8	4,0
	7,5	689,0	4,0
	10,0	647,4	4,0
	15,0	547,0	3,9
	20,0	415,7	3,9
	25,0	287,8	3,9
30,0	182,5	4,1	
38,9	0,0	4,3	

Static Pressure: 1 mm H<sub>2</sub>O = 0,04in H<sub>2</sub>O = 9,8 Pa  
Air Flow Rate: 1 m<sup>3</sup>/h = 0,59 cfm

