Part Numbers	Specifications	Applications	Features	Options
6402253 PULLER / STR. BLADE **6402254** PUSHER / STR. BLADE	DIAMETER 14" (350 mm) LOW PROFILE 12V 130W	HVAC Systems	Waterproof, IP68 (LL) Long Life High Efficiency	Mounting brackets EMC (Certified) Thermal Protector (ELL) Extreme Long Life

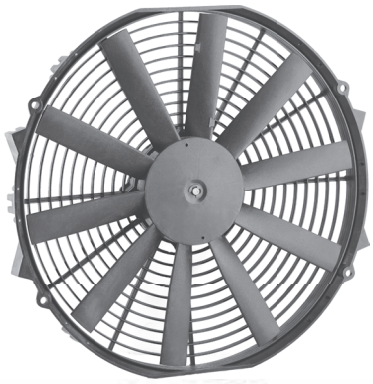

Test Voltage	V	13,0
Nominal Current	A	6,3
Nominal Speed	rpm	2.500
Max. St. Pressure	mmH_2O	17,0
Max. Airflow	m^3/h	1.775
Weight	kg	1,5

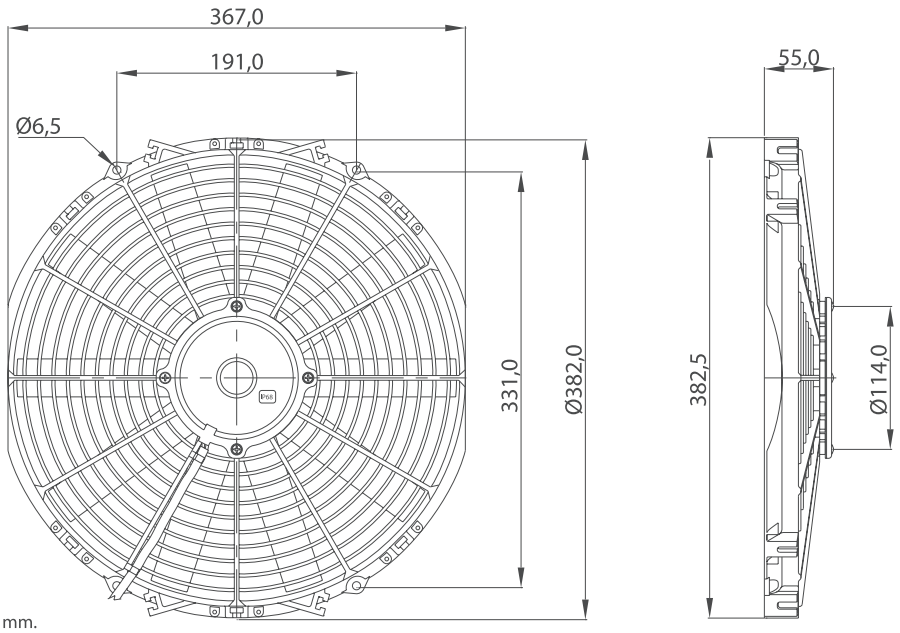

All dimensions are in mm.

TEST VOLTAGE = 13,0 VDC

Static Pressure	Air Flow Rate	Current
mm H_2O	m^3/h	A
0,0	1774,1	6,1
2,5	1553,5	6,6
5,0	1350,0	6,8
7,5	1088,3	6,8
10,0	685,2	6,8
12,5	328,4	6,8
15,0	105,1	6,7
16,8	0,0	6,6

Static Pressure: 1 mm H_2O = 0,04in H_2O = 9,8 Pa
Air Flow Rate: 1 m^3/h = 0,59 cfm

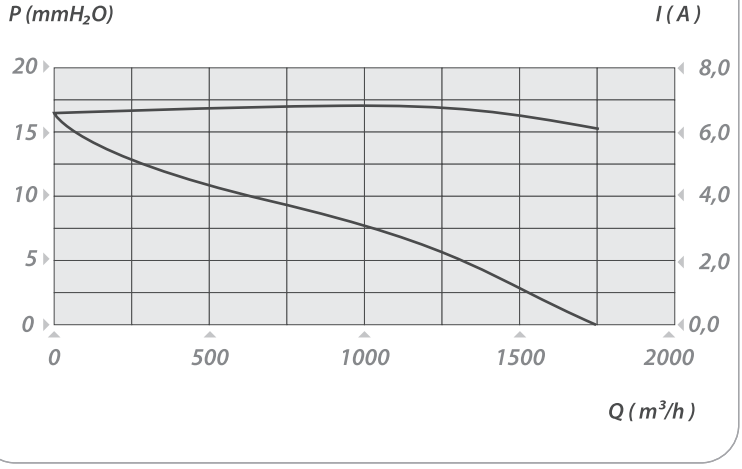

Relevant Codes : 6502046 (Similar Production Code)